



**MAYER** III

# MD900

## Software Update



**SYNTHESIZER FIRMWARE UPDATE** **3**

**CURRENT FIRMWARE VERSIONEN** **3**

**MD900 UPDATE DER FIRMWARE** **3**

**SYNTHESIZER XVAOS UPDATE** **5**

**CURRENT XVAOS VERSION** **5**

**MD900 UPDATE THE XVAOS** **5**

## Synthesizer Firmware Update

### Current Firmware Versionen

- Webpage: Home > Support > Downloads
  - Firmware Package
  - Contained in USB-Stick Update Archives

### MD900 Update der Firmware

- Copying the current firmware version file to the root directory of the enclosed USB stick
- In the root directory of the USB stick there exists a file  
*[n\_]MD900-Firmware-Vx.y.r-Installer.md900.pkg*



Info: x.y.r in the filename indicate the version number.

For USB stick update packages, the filename may contain a numeric prefix "n\_"



Attention: There must be only one file with the name


*[n\_]MD900-Firmware-Vx.y.r-Installer.md900.pkg* in the root directory

- Securely unplug the USB stick from the PC and plug it into one of the 3 USB ports on the back of the synthesizer
- After a few seconds, the synthesizer will stop and a prompt will appear to perform the update

*Found /media/MEMI/[n\_]MD900-Firmware-Vx.y.r-Installer.md900.pkg to process, continue?*

- Above the rotary pushbutton 1 appears the option: *Yes*  
Above the rotary pushbutton 2 appears the option: *No*
- If the displayed file name matches the desired update and is to be performed, the update process can be started by pressing the rotary pushbutton 1 (Option *Yes*)
- The update file is loaded and checked

- ☑ After that the update menu is displayed:

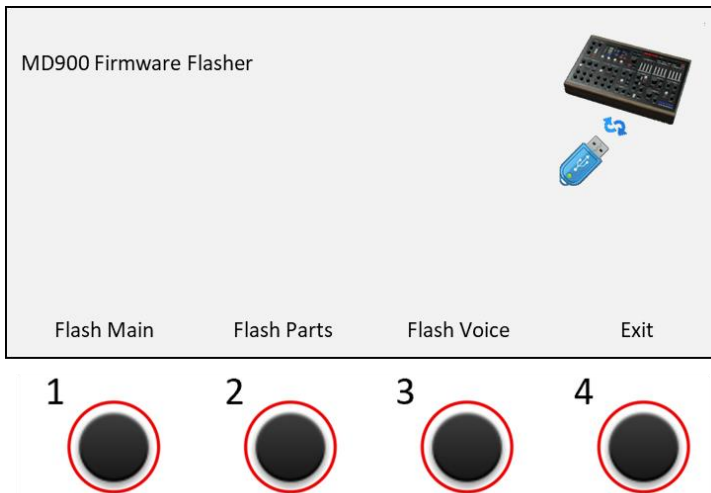

- ☑ Pressing a rotary key starts the firmware update
  - Press rotary pushbutton 1 (Option *Flash Main*)  
--> Flash Firmware of Main Board ...
  - Press rotary pushbutton 2 (Option *Flash Parts*)  
--> Flash Firmware of Parts Board ...
  - Press rotary pushbutton 3 (Option *Flash Voice*)  
--> Flash Firmware of Voice Board ...
- ☑ The flash process is started
- ☑ With ...ok is indicated that the process is finished
- ☑ Pressing the rotary pushbutton 4 (Option *Exit*) terminates the Firmware Update Tool

## Synthesizer XVAOS Update

### Current XVAOS Version

- Webpage: Home > Support > Downloads
  - XVAOS Update Package
  - Contained in USB-Stick Update Archives

### MD900 Update the XVAOS

To update the XVAOS, perform the following steps:

- Copy the current XVAOS version file to the root directory of the enclosed USB stick
- In the root directory of the USB stick there exists a file  
*[n\_]MD900-XVAOS-Vx.y.r-Update.md900.pkg*



Info: x.y.r in the filename indicate the version number.

For USB stick update packages, the filename may contain a numeric prefix "n\_"



Attention: There must be only one file with the name

*[n\_]MD900-XVAOS-Vx.y.r-Update.md900.pkg* in the root directory


- After a few seconds, the synthesizer will stop and a prompt will appear to perform the update

*Found /media/MEMI/[n\_]MD900-XVAOS-Update-Vx.y.r.md900.pkg to process,  
continue?*

- Above the rotary pushbutton 1 appears the option: *Yes*  
Above the rotary pushbutton 2 appears the option: *No*
- If the displayed file name matches the desired update and is to be performed, the update process can be started by pressing the rotary pushbutton 1 (Option *Yes*)
- The update file is loaded and checked

- ☑ After that the update menu is displayed:

### *MD900 XVAOS Updater*

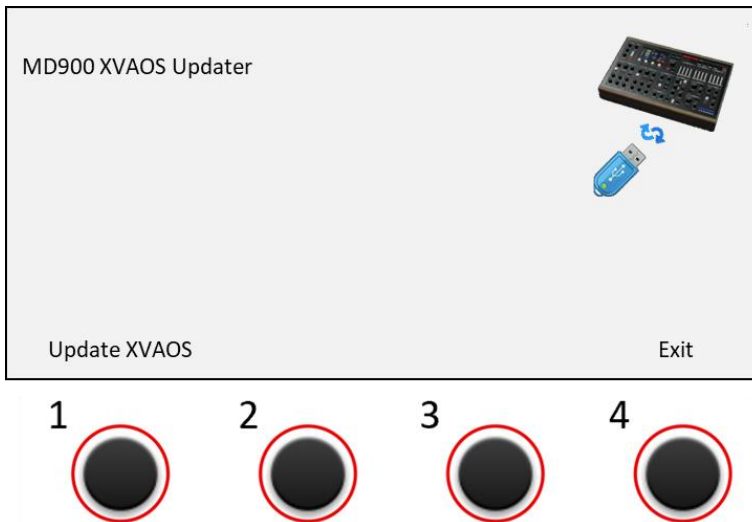

- ☑ Above the rotary pushbutton 1 appears the option: *Update XVAOS*  
Above the rotary pushbutton 4 appears the option: *Exit*
- ☑ To perform the update, press turnkey 1 (Option *Update XVAOS*).  
The update is started and confirmed with the following message  
  
--> Copy XVAOS update ... ok
- ☑ To exit, press the rotary knob 4 (Option *Exit*)
- ☑ The update menu is closed.