

Vibes MD850 V5.00,A - Aurora - Installation Instructions



Table of contents

1 Download latest Vibes Release	3
2 Copy to MEMI USB Stick	4
3 Insert USB Stick	5
4 Installer screen	6
4.1 Installation done	7
5 Check version	8


1 Download latest Vibes Release

- Navigate to <https://mayer-emi.at/manuals-and-firmware>
- Navigate to XVAOS V5.00,A – Aurora
- (1) Download Vibes V5.00,[?] for manual installation


[Home](#)
[Journal](#)
[Products ▾](#)
[Free FM Wavetables](#)
[Support ▾](#)
[About Us](#)
[Buy Now](#)


XVAOS V5.00,A — Aurora

Aurora, Firmware 5.0, is a free update for every MD850 Vibes, and it is the largest one we have ever shipped. Three features lead it: a second studio-grade reverb that runs alongside the reverb you already use, a per-voice Vintage Mode that stops every voice from sounding identical, and SFZ multisample import that turns your old sample libraries into playable oscillators inside the XVA engine. Around those sit 335+ new sounds in six packs, a reworked factory library, and a long list of engine, workflow and controller improvements musicians have been asking for.

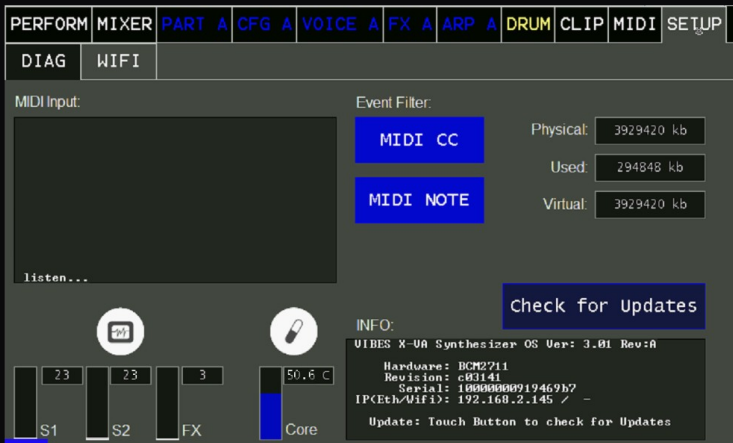

How to update: The easiest way is via online update

With Vibes Connect: Go to Device Status → Update Management → Update check

Download and install the V5.0 Aurora Update

On the box: Go to SETUP → DIAG → Check for Updates

Download and install the V5.0 Aurora Update

Alternatively, download the files below and install via USB pen drive.

[INSTALLATION GUIDE \(PDF\)](#)
[1 DOWNLOAD V5.00,A \(USB\)](#)


2 Copy to MEMI USB Stick

- Copy the File "MD850-Update-V5.00.[?].md850.pkg" into the root directory of the MEMI USB Stick

(1) Ensure the USB Pen Drive has the name "MEMI"

- or -

(2) Ensure there exist a file named "MEMI.config" in the root of the USB Pen Drive (The file can be empty)

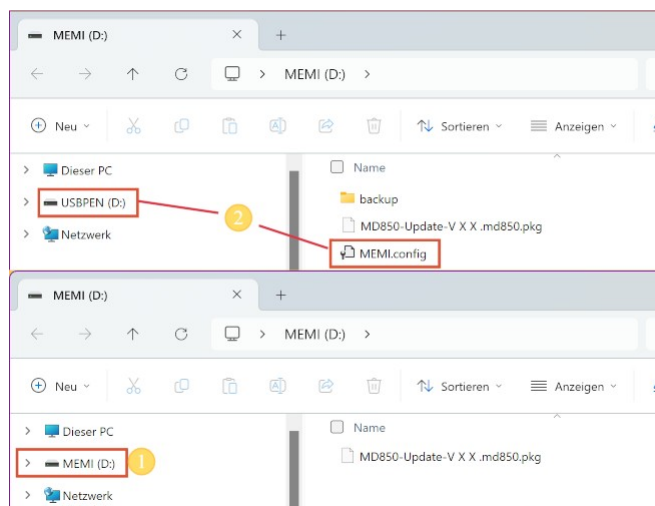

3 Insert USB Stick

1. Insert the USB Pen Drive in one of the USB Host Ports on the back of the Vibes



4 Installer screen

Wait for the installer screen to show up. Doublecheck the version to install.


1. Press first wheel knob to start installation
2. Press fourth wheel knob to exit the installer without installation



4.1 Installation done

After installation has started, the installation steps are logged.

The synthesizer engine will start up automatically after installation has finished.

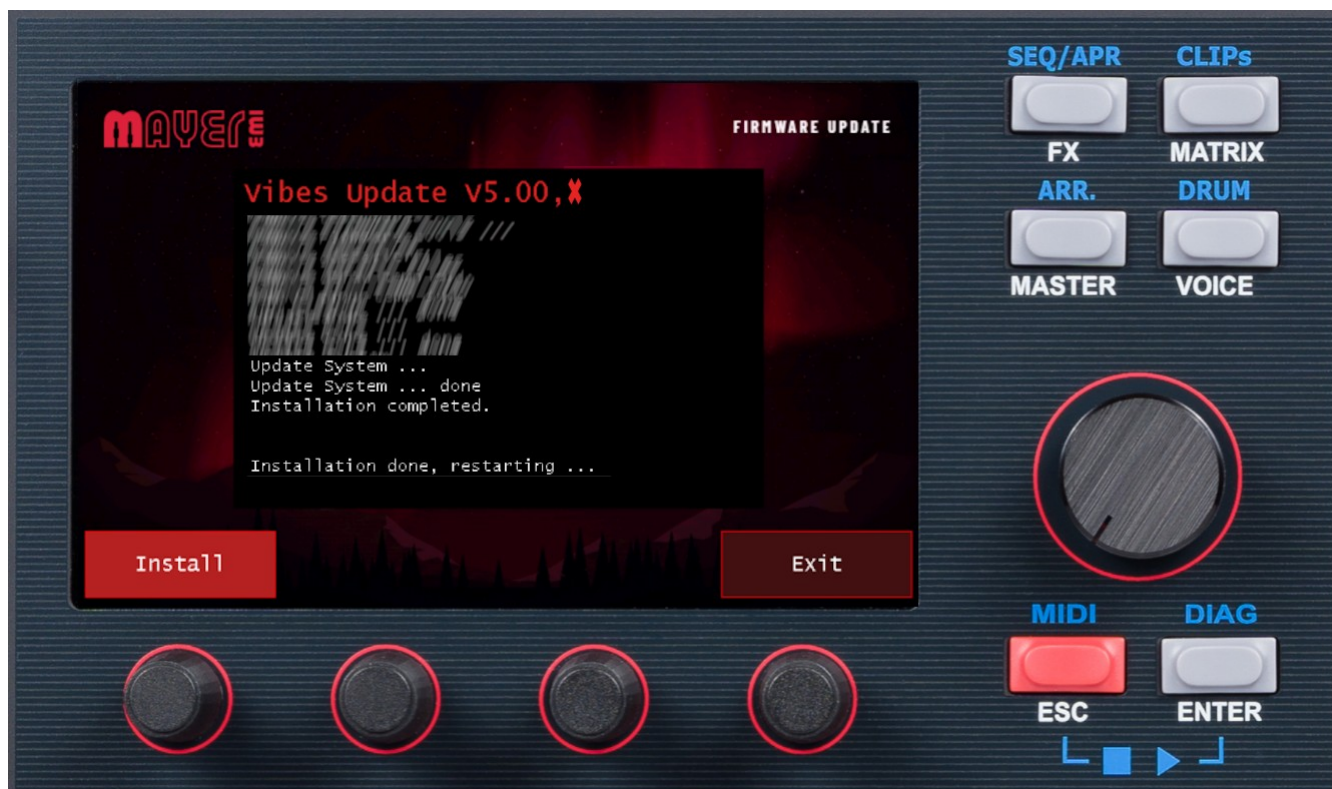

5 Check version

1. Select the SETUP / DIAG pane on the touch screen
2. Check for Version "5.00 Rev:X"

