

MD900-V2.40.C Installation Instructions

Table of contents

1 Download MD900 V2.40,C	3
2 Downloads	4
3 Copy to MEMI USB Stick	5
4 Insert USB Stick	6
5 Start Update Package	7
5.1 Update Package	8
6 Installer screen	9
6.1 Installation done	10
7 Check version	11

1 Download MD900 V2.40,C


- Navigate to <https://my.mayer-emi.at>
- Navigate to Downloads / Software
 - Open "MD900 XVAOS V2.40 Rev: C"

The screenshot shows the Mayer-EMI website's software download section. The header includes the Mayer-EMI logo, navigation links (Downloads, Wiki, Contact), and a user profile icon. The main content area is titled 'Software' and 'Software Products for Mayer-EMI Products'. It features a search bar and a list of software products. The product 'MD900 XVAOS V2.40 Rev: C' is highlighted with a red box.

Software Product	Item Code	Description
MD900 XVAOS V2.20.D	SW-XVAOS-MD900	XVAOS V2.20.D Update
MD900 Firmware	SW-Firmware-MD900	Firmware Update for MD900 Desktop Panels (including Assistance Displays)
MD900 Utilities	SW-Utility-Package	Download latest Utility Packages (Backup Tool, Drumkit Manager)
MD900 USB Stick Data	SW-USB-Stick-Data	Restore Data Package for USB Stick
MD900 XVAOS V2.30 Rev:A	SW-XVAOS-MD900-230	XVAOS V2.30.A Update
MD900 XVAOS V2.40 Rev: C	SW-XVAOS-MD900-240A	XVAOS V2.40.C Update OSC 1+2 Resonator any many more

2 Downloads

Download "MD900-XVAOS-V2.40.C.md900.pkg"

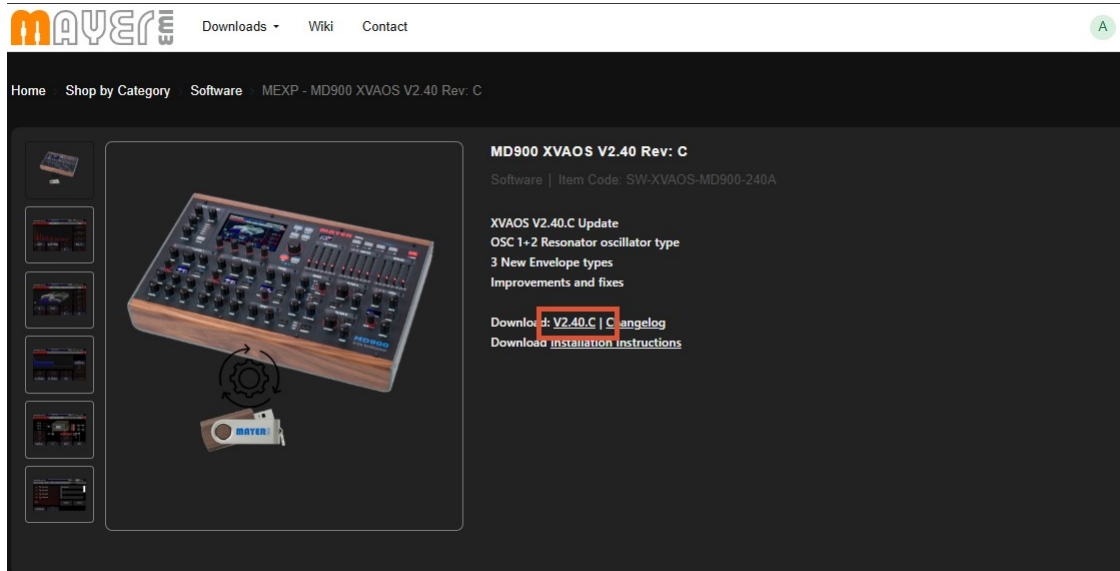


3 Copy to MEMI USB Stick

- Copy the File
"MD900-XVAOS-V2.40.C-Update.md900.pkg"
into the root directory of the MEMI USB Stick

Make sure to use the USB Stick delivered with the MD900

- or -

Ensure the USB Stick has the name "MEMI"

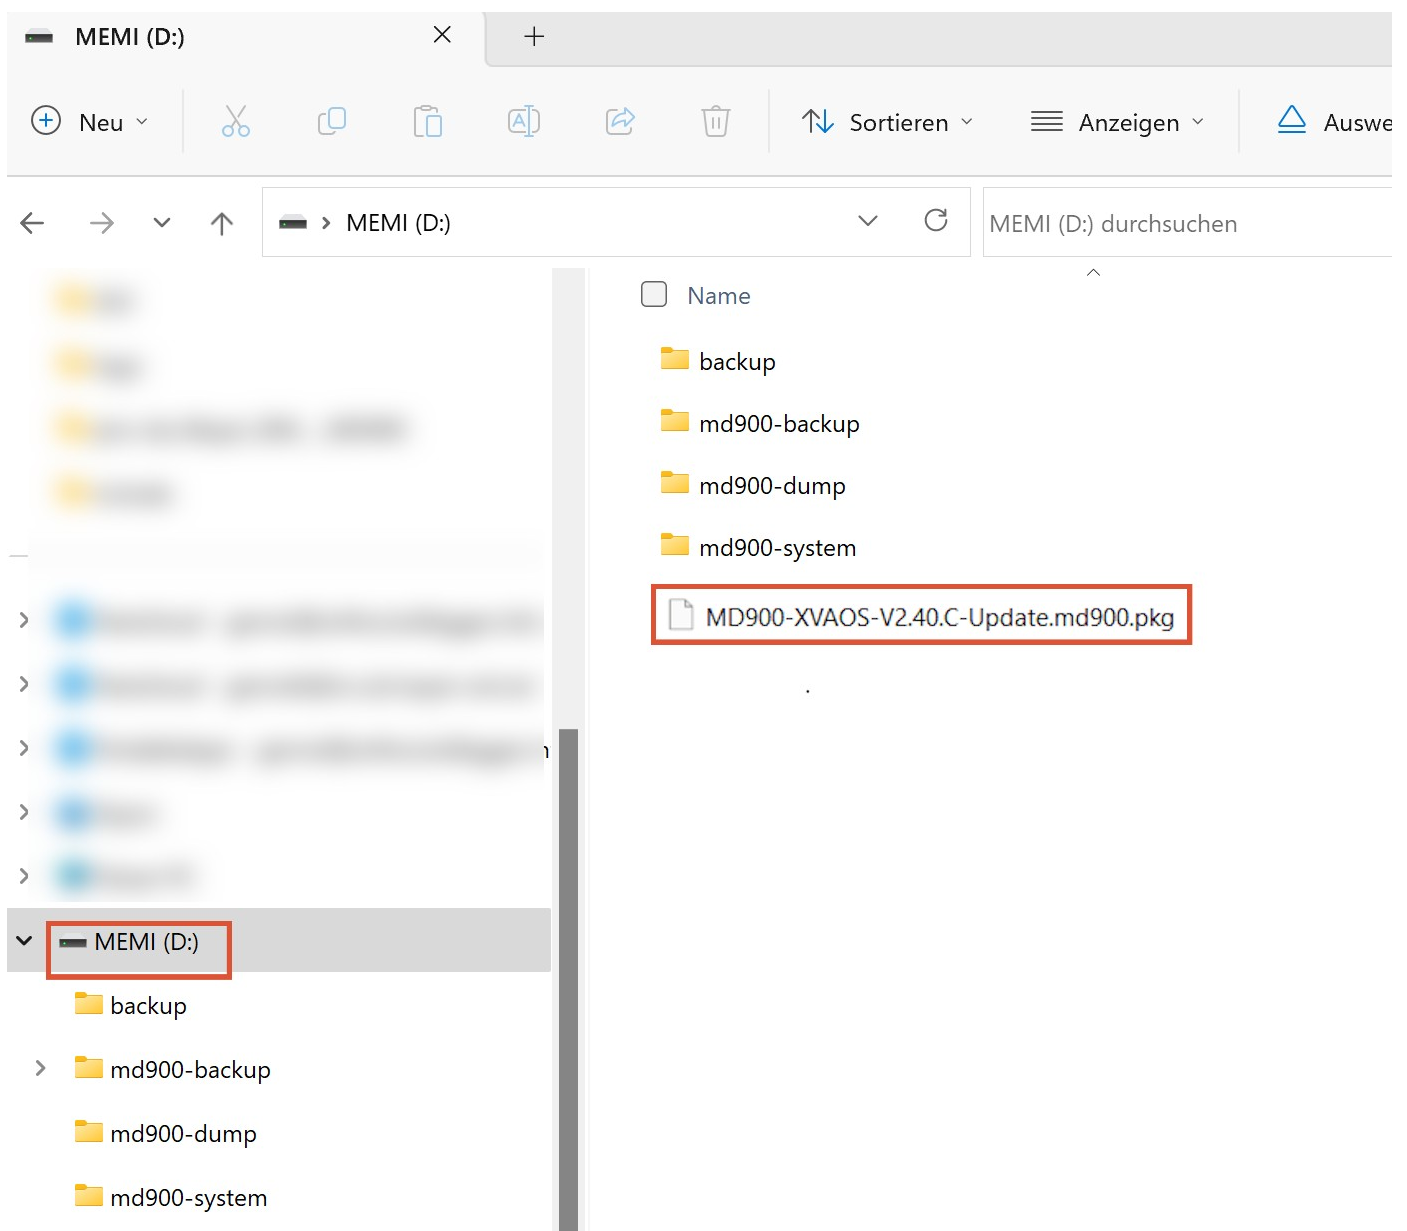

4 Insert USB Stick

1. Insert the USB Stick in one of the USB Host Ports on the back of the MD900



5 Start Update Package

Wait, until the question of found package(s) to process are shown:


1. Press first wheel knob to start installation
2. Press second wheel knob to skip

Doublecheck to ensure to process the wanted package.



5.1 Update Package


Detail Message of Package-Name to start

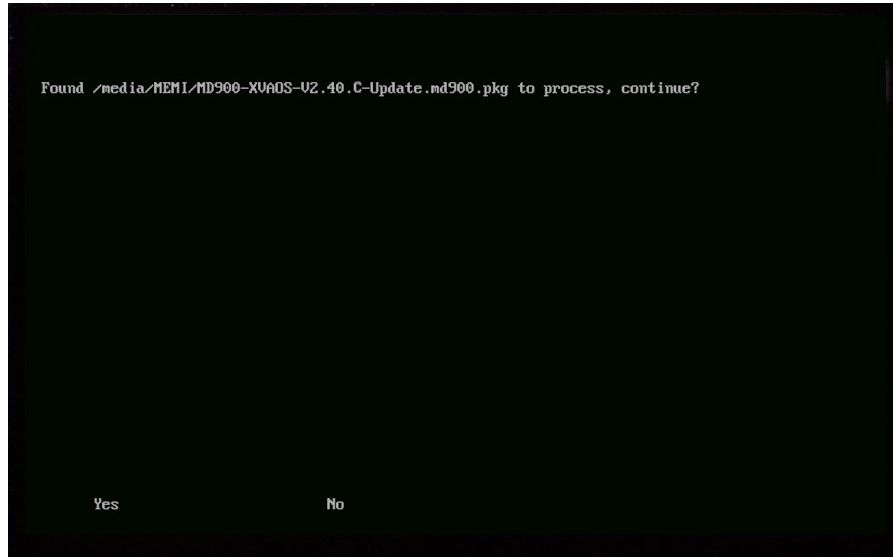

6 Installer screen

Wait for the installer screen to show up. Doublecheck the version to install.

1. Press first wheel knob to start installation
2. Press fourth wheel knob to exit the installer without installation

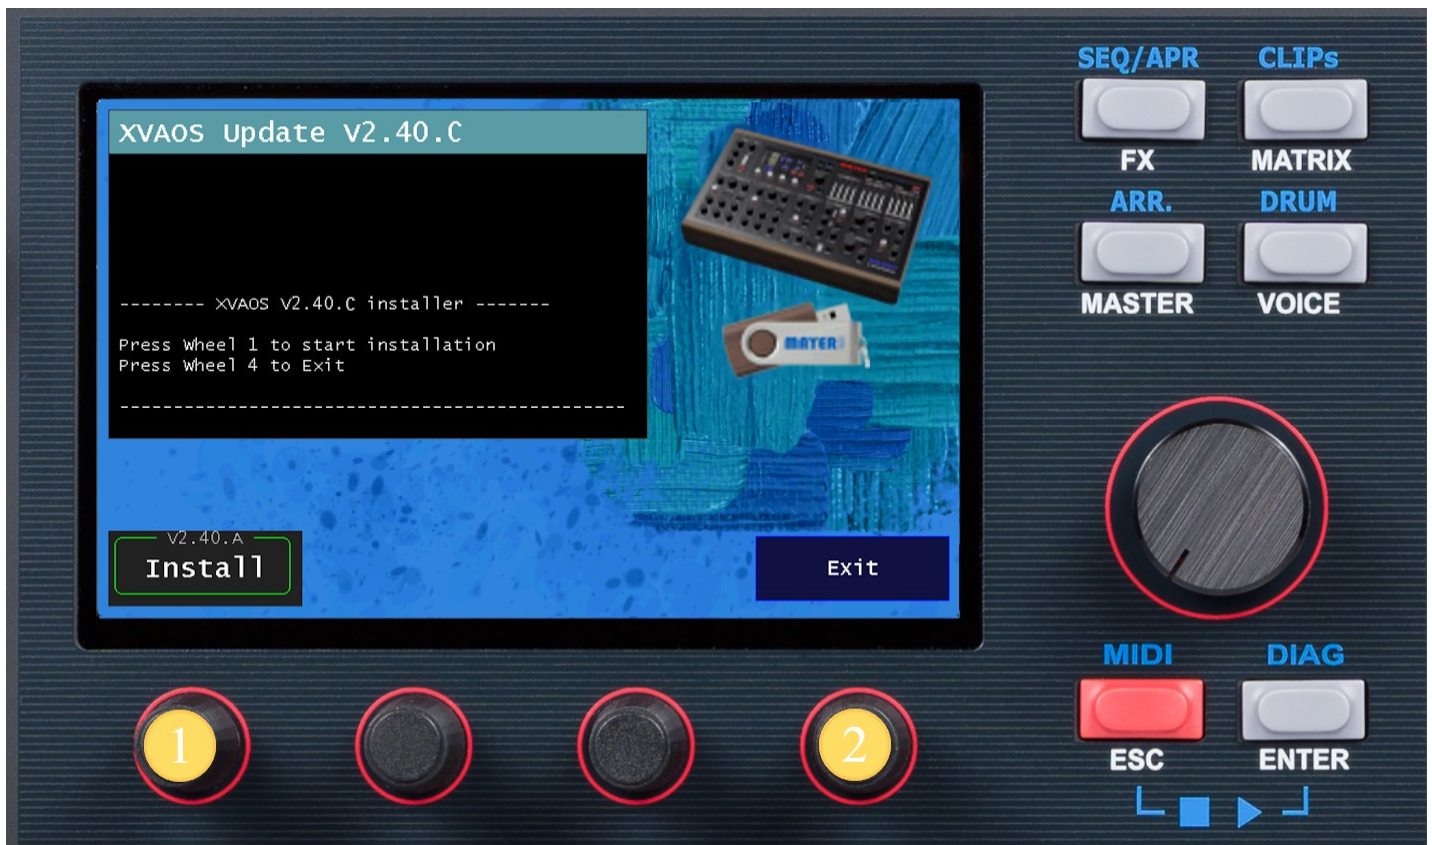


6.1 Installation done

After installation has started, the installation steps are logged.

1. Press fourth wheel knob to exit installation program after installation

The synthesizer engine will start up.

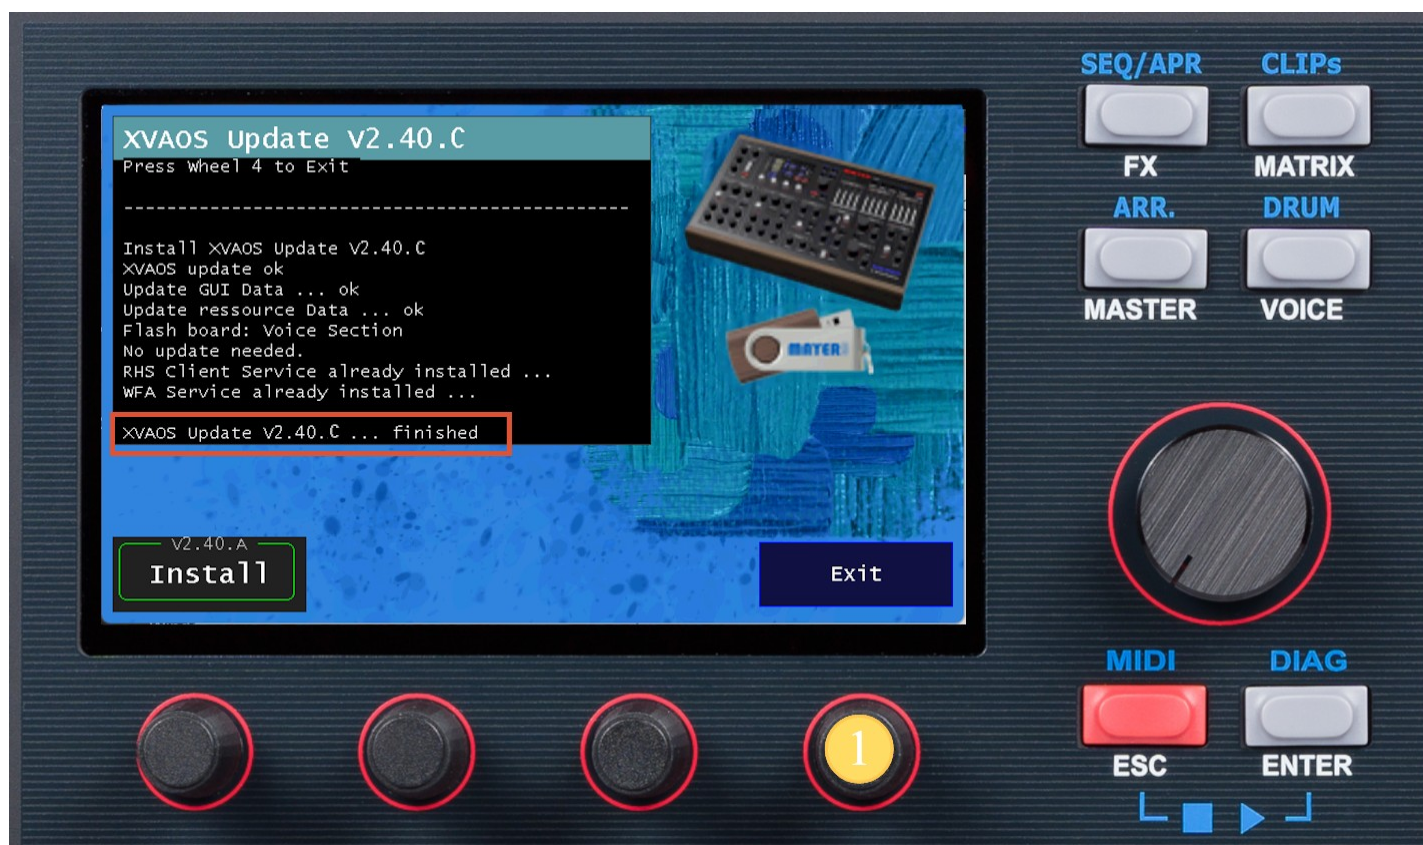

7 Check version

1. Select the DIAG pane on the touch screen
2. Check for Version "2.40 Rev:A"

